

MEASURING ANTENNÆ INPUT IMPEDANCES


**By Luiz Amaral
PY1LL/PY4LC**

Using antennæ impedance meters (some well-known by the hamradio community), general impedance meters (as some vector impedance meters, not so well-known) or even homebrew meters, it is relatively simple to measure the impedance at the lower end of the transmission line connected to the antenna. But this doesn't tell much about the input impedance of the antenna itself, as this is shown at the lower end transformed by the line.

To measure locally the antenna input impedance is difficult, as, if we lower the antenna to a more comfortable level, the electrical characteristics change much to render the measured values useless.

To perform the measurements with the antenna at its definitive place presents the physical difficulty of the eventual height, besides the parameters perturbation introduced by the presence of the person body and the meter itself and, depending on the frequency and other parameters, may be fatal.

The best manner to do it is with the line connected, but with its parameters controlled, that is, knowing the line surge impedance, its physical length, its velocity factor and if necessary, its loss at the operation frequency. With this line connected to the antenna, ones measures the impedance reflected to the line lower end and infers the load impedance (the antenna itself at the upper end of the line). See the Figure below.

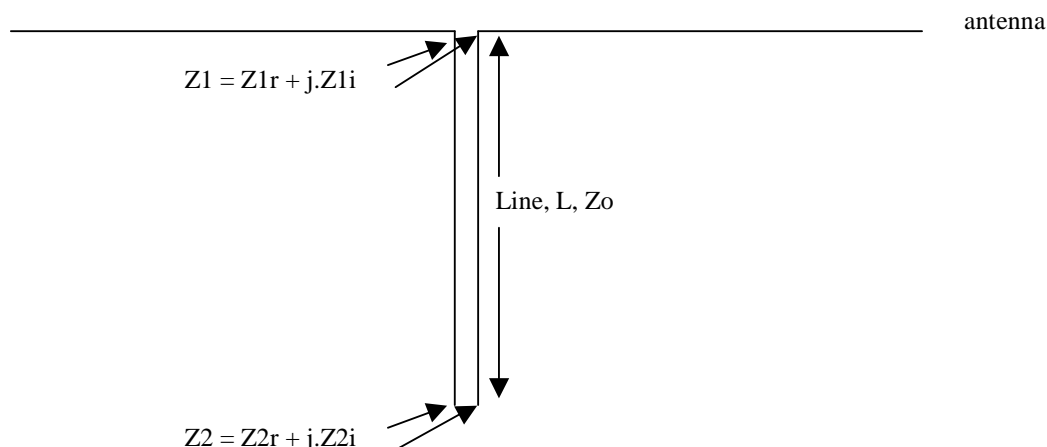

For practical effects, we may consider the line as ideal (lossless) as we must always work with the minimum loss as possible, but those more purist may perform the tasks considering the losses too.

For an ideal line with surge impedance Z_0 , with physical length L , loaded by impedance Z_1 , the reflected impedance Z_2 at the other is given by:

$$Z_2 = Z_0 \cdot [Z_1 + Z_0 \cdot j \cdot \tan(\beta \cdot L)] / [Z_0 + Z_1 \cdot j \cdot \tan(\beta \cdot L)] \quad [1]$$

where $\beta = 2 \cdot \pi \cdot L / \lambda$, with λ the wavelength on the cable, that is, talking into account the velocity factor:

$\lambda = v / f = \gamma \cdot c / f$, with v = velocity of light in the cable, γ = cable velocity factor, f = operation frequency and j = imaginary unity.

$$\text{So, } \beta = 2 \cdot \pi \cdot L \cdot f / (\gamma \cdot c) \quad [2]$$

From [1], we can get Z_1 , that means, which is the load impedance Z_1 that corresponds to reflected measured impedance Z_2 :

$$Z_1 = Z_0 \cdot [Z_2 - Z_0 \cdot j \cdot \tan(\beta \cdot L)] / [Z_0 - Z_2 \cdot j \cdot \tan(\beta \cdot L)] \quad [3]$$

Thus, the measured value Z_2 at the lower end of the line put into the expression [3] and using [2], let us know the impedance presented by the antenna at its upper end.

It is clear that Z_1 as much as Z_2 can have both resistive and reactive components⁽¹⁾. If the antenna is a resonant load, its reactive component is zero and, therefore, Z_2 is real.

By analyzing [1], we verify that $Z_2 = Z_0$ if and only if $Z_1 = Z_0$ ⁽²⁾, when the standing wave ratio VSWR = 1:1.

This process let us adjust an antenna with successive measurements till we get, if possible, the desired condition, that is, $Z_2 = Z_0$ for any length L , what corresponds to VSWR = 1:1 and when the total loss in the cable is a minimum.

To increase the speed of the process, the expression [3] may be calculated by a computer program (or programmable pocket calculator) using a very simple program, remembering that, indeed, the resistive and reactive components of Z_1 are calculated separately.

So, if Z_1 and Z_2 have components Z_{1r} and Z_{1i} and Z_{2r} and Z_{2i} , where r = real and i = imaginary⁽³⁾, we have:

$$Z_1 = Z_{1r} + j \cdot Z_{1i}$$

**By Luiz Amaral
PY1LL/PY4LC**

⁽¹⁾The resistive part of impedances is real and the reactive is imaginary. As we are neglecting the losses, here Z_0 is real.

⁽²⁾For finite cable lengths, as it is the case here.

⁽³⁾In this notation, both components are real numbers.

$$Z_2 = Z_{2r} = j \cdot Z_{2i}$$

We may write [3] as:

$$Z_{1r} + j \cdot Z_{1i} = Z_0 \cdot [Z_{2r} + j \cdot Z_{2i} - j \cdot Z_0 \cdot \tan(\beta \cdot L)] / [Z_0 - j \cdot (Z_{2r} + j \cdot Z_{2i}) \cdot \tan(\beta \cdot L)]$$

By equaling the real and imaginary parts in both sides, we get:

$$Z_{1r} = Z_0^2 \cdot Z_{2r} \cdot [1 + \tan^2(\beta \cdot L)] / \{ [Z_0 + Z_{2i} \cdot \tan(\beta \cdot L)]^2 + Z_{2r}^2 \cdot \tan^2(\beta \cdot L) \} \quad [4]$$

$$Z_{1i} = Z_0 \cdot \{ (Z_{2i}^2 + Z_{2r}^2 - Z_0^2) \cdot \tan(\beta \cdot L) + Z_0 \cdot Z_{2i} \cdot [1 - \tan^2(\beta \cdot L)] \} / \{ [Z_0 + Z_{2i} \cdot \tan(\beta \cdot L)]^2 + Z_{2r}^2 \cdot \tan^2(\beta \cdot L) \} \quad [5]$$

So we measure Z_{2r} and Z_{2i} with the impedance meter at the lower end of the line and, applying their values in [4] and [5], we get then, Z_{1r} and Z_{1i} .

Let's see a special case, when the antenna is resonant, that is, $Z_{2i} = 0$ and the cable length is an integer multiple of $\frac{1}{2}$ wavelength, that is, $\beta = 0$ or $\tan(\beta \cdot L) = 0$. In this case we have:

$$Z_{1r} = Z_0^2 \cdot Z_{2r} / Z_0^2$$

$$Z_{1i} = Z_0^2 \cdot Z_{2i} / Z_0^2$$

or $Z_{1r} = Z_{2r}$ e $Z_{1i} = 0$, as we expected.

If, besides, $Z_{2r} = Z_0$, that is, $VSWR = 1:1$, then $Z_{1r} = Z_0$, obviously.

The measurement process, although indirect, has the advantage to lead to more reliable results due to there not be spurious factors interference as the modifications introduced by the proximity of conductors, etc.

It is important remember that, before the antenna is put to the place where the measurements will be performed, the transmission line must be measures as its physical length. We cannot forget to have at hand its surge impedance, its velocity factor and the working frequency.

If the measurement doesn't lead to satisfactory results, modifications to the antenna, as height, length, apex angle (if it is the case), etc, must be done and new measurements executed. The process is repeated till we get

**By Luiz Amaral
PY1LL/PY4LC**